

TruPoint Doctor Blade

Flexo Concepts is a global manufacturer of doctor blades for precision metering, wiping and cleaning. We offer high-quality solutions for companies that print, applying coatings, or are engaged in other continuous production processes.

Labels & Flexibles



TruPoint Orange® doctor blades outperform traditional steel doctor blades in virtually every category. Orange blades deliver longer blade life, enhanced metering precision, significantly reduced anilox wear and scoring, increased safety and a solution to many common ink delivery system issues.

Product Benefits & Features:

- Consistent Metering
- No UV Ink Spitting
- No Anilox Scoring
- HD Flexo Certified
- Increased Blade Life

Structure	Hardness	Max. Temp	Length	Thickness	Edge Profile	Max. Width
Derlin	Rockwell R 120	180°F / 82°C	Standard Roll Length: 100' / 30m Max Roll Length: 250' / 75m Cut to Length available	.027" / 0.70mm .040" / 1.00mm .050" / 1.27mm .060" / 1.60mm .080" / 2.00mm	Micro Tip® M8 M10 M15 M25 Bevel 15° 22° 30°	3" / 76mm



TruPoint Keon™ is a premium doctor blade that is specially designed to withstand high temperatures as well as abrasive inks, coatings and other formulas. The blade is stiff, durable, extremely wear-resistant and able to hold its shape and metering ability in the toughest of applications.

Product Benefits & Features:

- Heat & Chemical Resistance
- Superior Metering
- No Anilox Scoring
- Increased Blade life
- Safe to Handle

Structure	Hardness	Max. Temp	Length	Thickness	Edge Profile	Max. Width
Peek	Shore D 84	450°F / 230°C	Standard Roll Length: 100' / 30m Max Roll Length: 250' / 75m Cut to Length available	.030" / .8mm .040" / 1.0mm	Micro Tip® M8 M10 M15 M25 Bevel 15° 22° 30°	2.375" / 60.3mm

TRUPOINT
POLYESTER™




TruPoint Polyester™ **containment blades** are highly resistant to chemicals, offer superior blade life and reduce anilox scoring in chambered blade systems.

Product Benefits & Features:

- Drop in replacement
- No Anilox Scoring
- Increased Blade life

Structure	Hardness	Max. Temp	Length	Thickness	Edge Profile	Max. Width
Polyester / Mylar	N/A	230°F / 110°C	Standard Roll Length: 100' / 30m Max Roll Length: 250' / 75m Cut to Length available	.007" / 0.19mm .010" / 0.25mm .015" / 0.37mm .020" / 0.50mm	Straight Bevel 15°	4" / 101.6mm

Products for Label/Package Printing

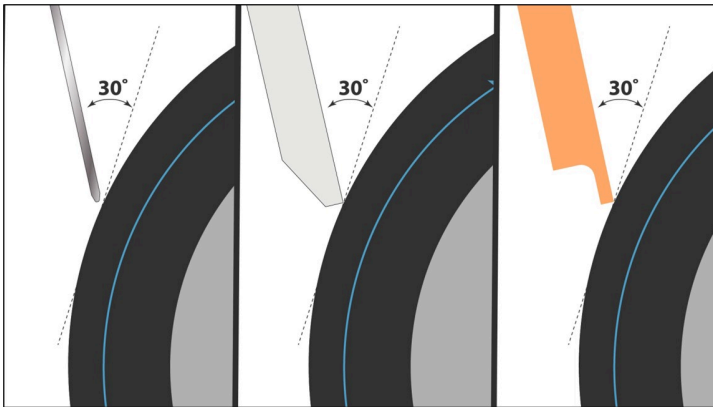

TRUPOINT
POLYESTER™

TRUPOINT
ORANGE

TRUPOINT
KEON

